

Series	84	
Mounting	Ceiling mounted	
Glass Colour	Clear	
Lamp	1W LED, 2700K, 100Im (2500K and 3000K options available) 10W Xenon, 2600K, 81Im	
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 84.1 - 84.9 Non-adjustable Length: 84.11 - 84.61	
Canopy Finishes	84.1 - 84.7: white, black or brushed nickel canopy 84.9 - 84.61: white canopy	
Materials	Blown glass, copper mesh, braided metal coaxial cable, electrical components, steel canopy	
Power Supply	Integral Remote mounted for 84.1m	
	Bocci recommends remote mounting power supplies for ease of long-term maintenance.	
Environment	Indoor, dry location. IP30	
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.	
Patent #	US Patent pending EU 003611144-0001 to 0004	
Certifications		

(1)	
V	
1	

± 110 -120mm

± Ø110 - 120mm

\bigcirc	
Round	
84.1	2
84.3	6.5
84.5	10.7
84.7	15.2
84.13	29.6
84.14	40.2
84.26	67.7
84.36	91.4
84.19	45.8
84.37	84.8
84.61	139

Weight (kg)


Square

84.11	36.6
84.26	69.5
84.36	113.4


Rectangle	

84.9	28.2
84.11	36.6
84.14	39.5
84.20	67.7
84.26	80
84.36	91.8

ADJUSTABLE LENGTH

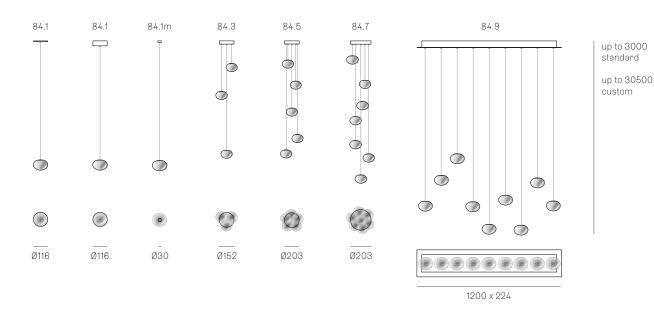

NON-ADJUSTABLE LENGTH




Best practices for wiring multiple single pendant fixtures with remote

Multiple single pendant fixtures should be wired in parallel. DO NOT wire


Calculations for distance to the power supply, or required wire guage in

order to avoid voltage drop, are the responsibility of the installing party.


Bocci recommends a home run line for each fixture location to avoid




850 x 284



508





1320 x 300

up to 3000 standard

up to 30500 custom

BOCCI.COM

in series.

٠

.

mounted power supplies:

significant voltage drop.


All dimensions are in millimeters (mm) unless otherwise specified.


up to 3000 standard

up to 30500

custom

NON-ADJUSTABLE LENGTH

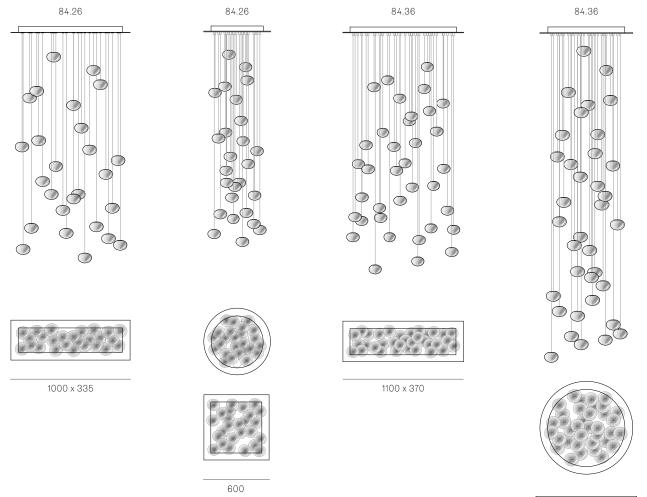



755