

m o o o i

Perch Light Tree

UMUT YAMAC



What is more poetic and elegantly captivating than a bird perched on a branch, flirting, singing and celebrating life? We all recognize this image and steal a moment from our precious time to admire this triumph of nature and beauty.

Detailing




These sunlit birds are free to swing when softly touched, gently glowing and bringing along the promise of spring.

Colours

Brass and white

Perch Light Tree

Dimensions

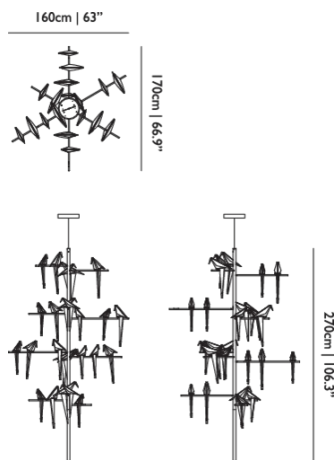

Product

WIDTH 170cm | 66.9"
HEIGHT 270cm | 106.3"
DEPTH 160cm | 63"
WEIGHT NETTO 225kg | 496.04lbs

Packaging

WIDTH 180cm | 70.9"
HEIGHT 222cm | 87.4"
CUBAGE 7.19m³ | 254.01ft³
LENGTH 180cm | 70.9"
WEIGHT 225kg | 496.04lbs

Technical CE

MATERIAL

Steel and aluminium frame with polypropylene (PP) and synthetic paper birds.

ENERGY LABEL

Energy Label B

LIGHTSOURCE TYPE

LED

LIGHTSOURCE INCLUDED

Yes

NUMBER OF LIGHTSOURCES

25

INPUT VOLTAGE

90-305

FREQUENCY

50/60

MAX POWER CONSUMPTION

90W

DIMMABLE

Yes

LAMPHOLDER

LED (Solid state)

LIFETIME

50000 hours

CABLE COLOUR

Black

CABLE LENGTH

1000cm | 393.7"

CANOPY

Matching steel cylinder

COLOUR TEMPERATURE

3000 K

CRI

80

LIGHT DIRECTION

All directions

LIGHT OUTPUT

2340 lm

Technical cULus

MATERIAL

Steel and aluminium frame with polypropylene (PP) and synthetic paper birds.

ENERGY LABEL**INSTALLATION REQUIRED**

Yes

LIGHTSOURCE TYPE**LIGHTSOURCE INCLUDED**

LED

Yes

NUMBER OF LIGHTSOURCES**INPUT VOLTAGE**

25

100-240

FREQUENCY**MAX POWER CONSUMPTION**

50/60

120W

DIMMABLE**LAMPHOLDER**

Yes

LED (Solid state)

LIFETIME**CABLE COLOUR**

50000 hours

Black

CABLE LENGTH**CANOPY**

1000cm | 393.7"

Matching steel cylinder

COLOUR TEMPERATUE**CRI**

3000 K

80

LIGHT DIRECTION**LIGHT OUTPUT**

All directions

2340 lm

Dimmer

For fluent dimming behaviour we advise a dimmer that is compatible with the following specs.

DIMMER TYPE

1-10V

Please note the functioning of the dimmer and the power supply combination can never be predicted, it always needs to be tested in practice.
