

Image shown above 100.16 with square canopy

± 210 - 170mm

Series	100
Mounting	Ceiling mounted
Glass Colours	Frosted clear, frosted grey
Lamp	1W LED, 2700K, 100lm (2500K and 3000K options available) 1.5W LED, 3500K, 160lm
Coaxial Length	3000mm standard / up to 30500mm maximum Adjustable length: 100.1 - 100.7 Non-adjustable Length: 100.11 - 100.28
Canopy Finishes	100.1 - 100.7: white, black or brushed nickel canopy 100.11 - 100.28: white canopy
Materials	Blown glass, copper mesh, braided metal coaxial cable, electrical components, steel canopy
Power Supply	Integral Remote mounted for 100.1m Bocci recommends remote mounting power supplies for ease of long-term maintenance.
Environment	Indoor, dry location. IP30
Note	Every single Bocci product is handmade. Each one is variously blown, poured, carved, polished, packed and dispatched directly by us. As such, no two products are identical; they are individual, irregular expressions of our research.
Patent #	US D1027 281S EU 008526131-0001



Weight (kg)



Round

100.1	2.8
100.3	7.7
100.5	12.1
100.7	17.2
100.11	38
100.20	64.8



Square


100.11	38.1
100.16	53
100.28	87



Rectangle


100.11	37.6
100.16	54.2
100.20	64.4
100.28	87.9

ADJUSTABLE LENGTH

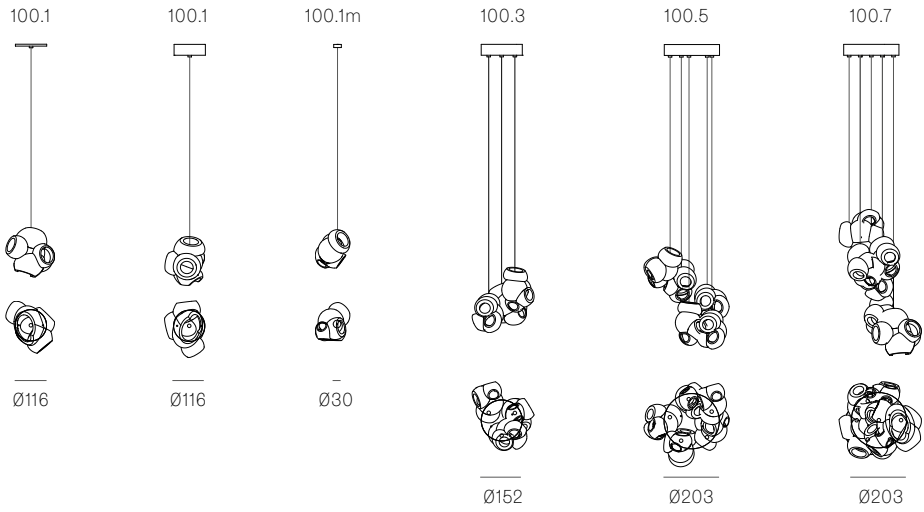

up to 3000
standard
up to 30500
custom

NON-ADJUSTABLE LENGTH

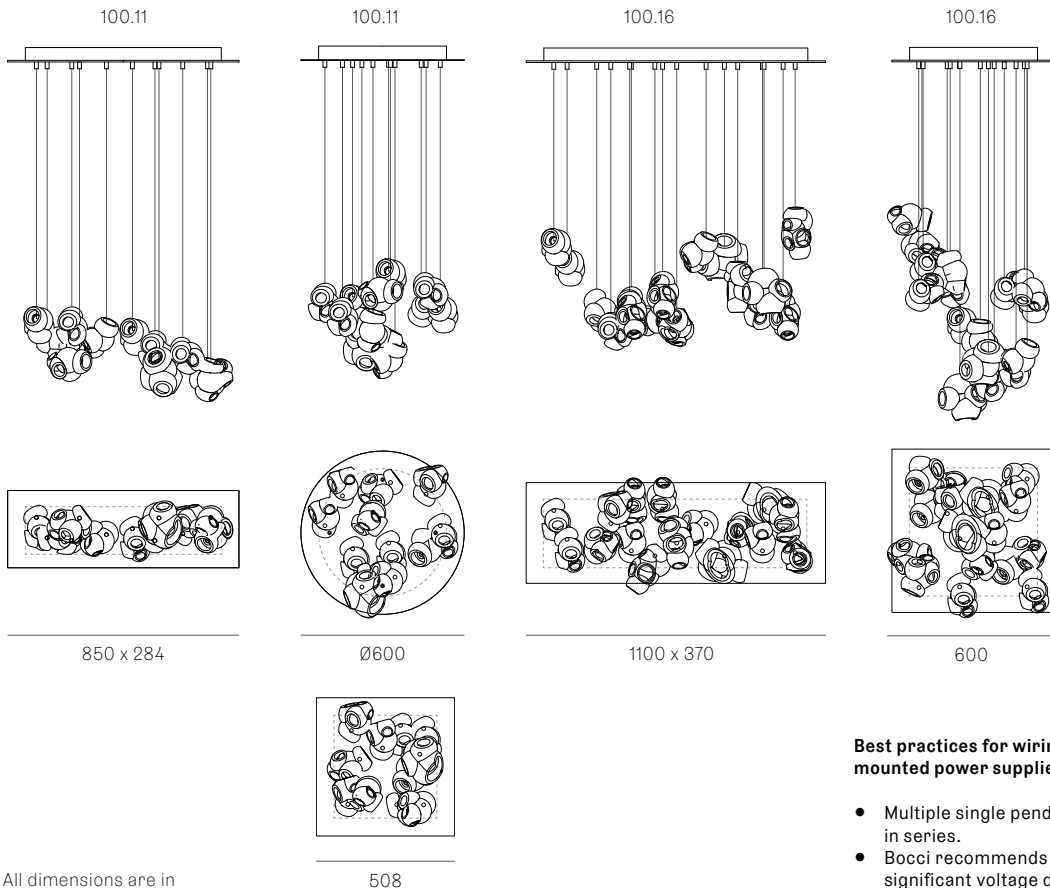

up to 3000
standard
up to 30500
custom


All dimensions are in millimeters (mm) unless otherwise specified.

Best practices for wiring multiple single pendant fixtures with remote mounted power supplies:

- Multiple single pendant fixtures should be wired in parallel. DO NOT wire in series.
- Bocci recommends a home run line for each fixture location to avoid significant voltage drop.
- Calculations for distance to the power supply, or required wire guage in order to avoid voltage drop, are the responsibility of the installing party.


NON-ADJUSTABLE LENGTH

100.20

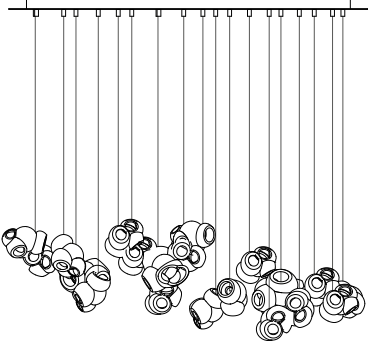



1320 x 300

100.20

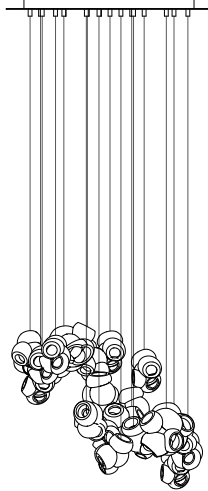



Ø755

100.28

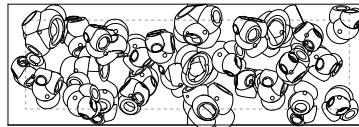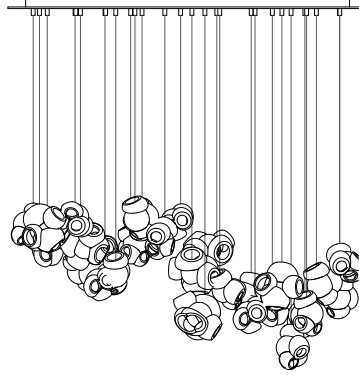

1320 x 444

100.28

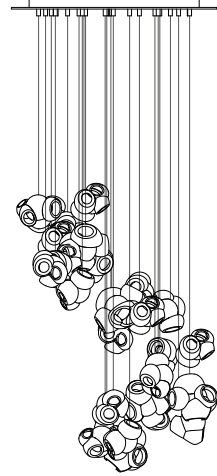

755

up to 3000
standard

up to 30500
custom

All dimensions are in millimeters (mm)
unless otherwise specified.